

R400T PLUS

Chocolate enrobing belt for tempering machines

chocolate coating belt

The machine is equipped with a touch screen panel

The working width is 400mm

The heating lamps and the resistances located under the belt are controlled electronically

Ability to set the velocity and functionality of the air blower


The tail cutting roller is electronically controlled

The machine is equipped with a plexiglass cover

Purposely built for connecting to the TUNNEL 400 but it can also be connected to existing cooling machines. The stainless steel belt has a width of 400 mm and is divided into two parts: the loading section and the coating section, both of which are protected by a special cover. The machine has 4 independently thermoregulated resistances located in the various operational zones. The belt and the blower are controlled via a LCD screen which allows for the optimisation of the coating base of the product.

Technical data

Electrical specification: 400 V 3-phase 50/60 hz
 Option: 220 V 3-phase
 Power consumption: 3 kW
 Electrical supply plug: 16A - 5 poles
 Dimension: w. 1000 mm, d. 1250 mm, h. 1350 mm

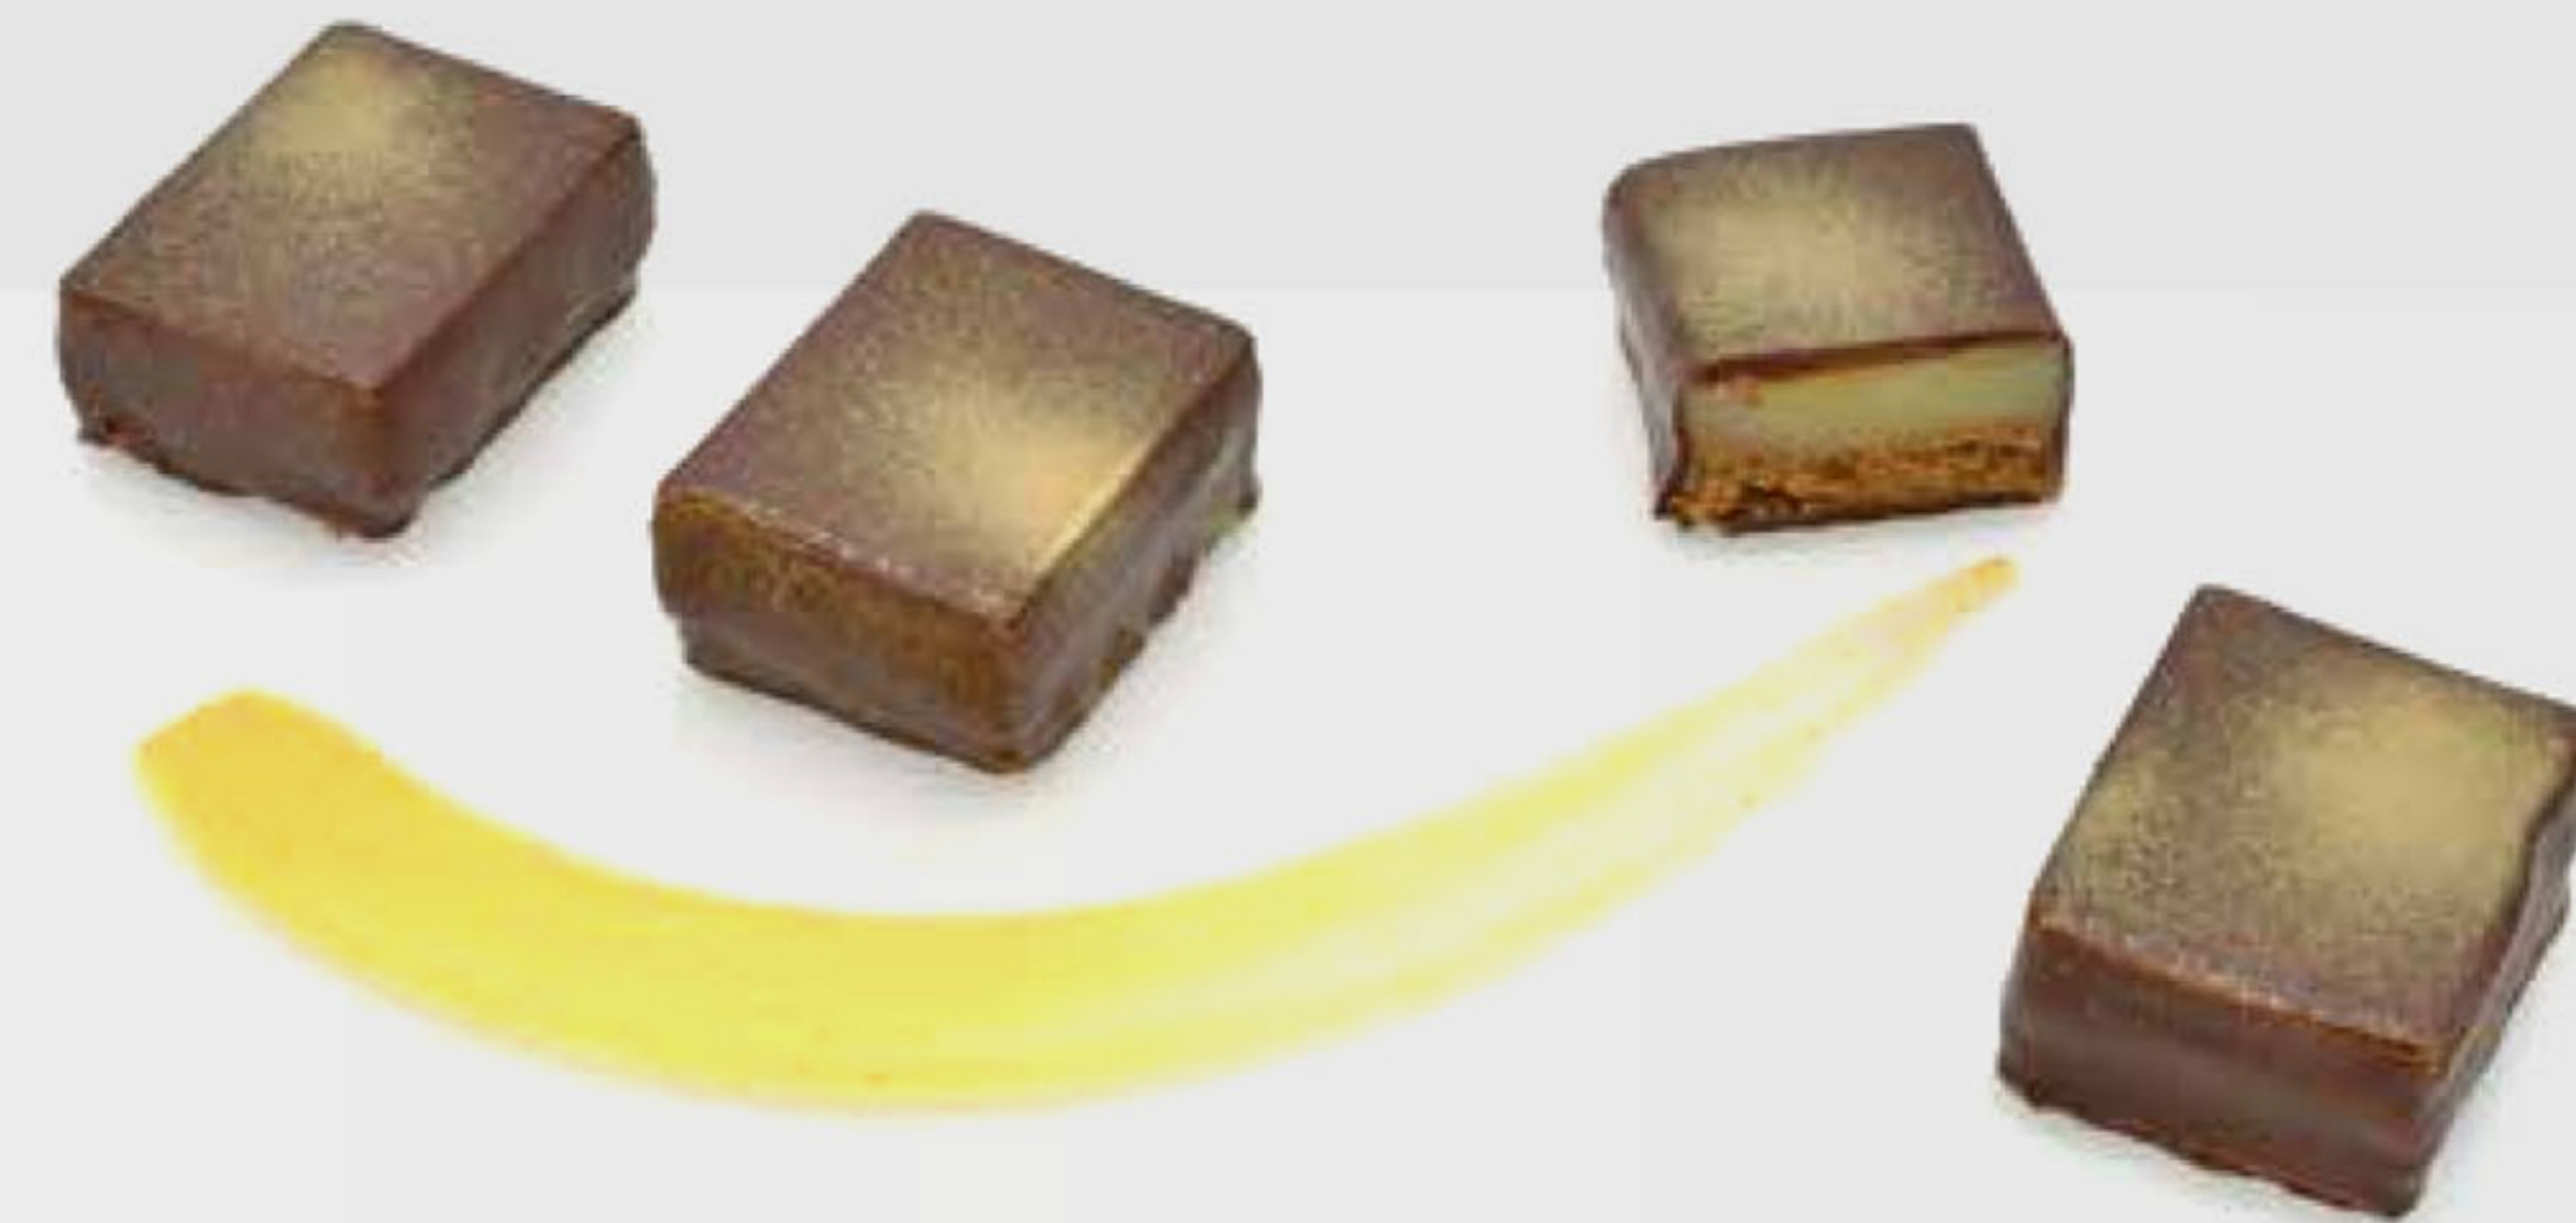

R 400 plus

TEMPERING
MACHINES
ACCESSORIES
ENROBING